


The SP900 Series horizontal double web pouch machine is perfectly suited for a wide range of packaging applications. Its flexibility and extensive selection of specialized options have made it especially popular with book publishers and firms engaged in direct mail fulfillment. Hand fed or automatic operation with delivery rates of 35-45 packages per minute depending on length of package. The COLD FUSION system eliminates heating elements and high electrical usage.

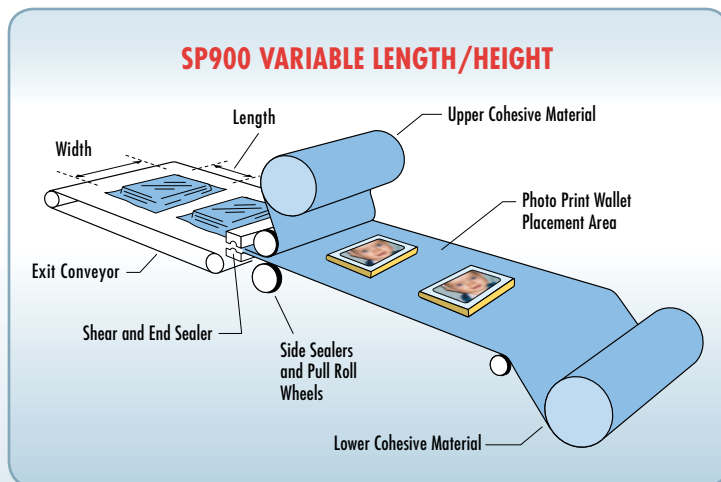

# SP900

## COLD FUSION PACKAGING SYSTEM

### STANDARD FEATURES

- Available in 12" and 18" web widths
- 8' infeed conveyor
- 3' exit conveyor
- Touch screen control panel
- Dial-in length control system to vary pouch length in 1/8" increments
- Quick change pneumatic spindles

### SYSTEM OPTIONS

- Single or multiple friction feeders for automatic collating
- Adjustable hopper and feeders for books, CD's, videos and cassettes
- Scan, print and apply labeling systems
- Package scales
- Perforators or fold-over bars for easy-opening packages

### PACKAGE SIZES AND MACHINE FOOTPRINT

#### 900-12

- Minimum: 4" x 5" (101.6<sub>mm</sub> x 127<sub>mm</sub>)
- Maximum: 12" x 20" (304.8<sub>mm</sub> x 508<sub>mm</sub>)
- Height: 2-1/2" (63.5<sub>mm</sub>)
- L: 94" x D: 50" x H: 76"
- (L: 2.4<sub>m</sub> x D: 1.3<sub>m</sub> x H: 1.9<sub>m</sub>)

#### 900-18

- Minimum: 4" x 6" (101.6<sub>mm</sub> x 152.4<sub>mm</sub>)
- Maximum: 18" x 34" (457.2<sub>mm</sub> x 863.6<sub>mm</sub>)
- Height: 5" (127<sub>mm</sub>)
- L: 130" x D: 50" x H: 72"
- (L: 3.3<sub>m</sub> x D: 1.3<sub>m</sub> x H: 1.8<sub>m</sub>)

### MACHINE REQUIREMENTS

- Electrical: 115 volts, 1 phase, 60 hz. 15 amps
- Air: 80 PSI
- Note: Addition of some options may change requirements.

**TENSION PACKAGING**

Automated Order Fulfillment Solutions  
www.tensionpackaging.com

819 East 19th Street, Kansas City, MO 64108

Main: 816-283-1475 ■ Fax: 816-283-1468

For more information, e-mail: packinfo@tension.com