


A FLEXIBLE AND EFFICIENT COLD/HEAT AUTOMATED PACKAGING SYSTEM DESIGNED TO REPLACE HAND PACKED POLYBUBBLE AND PADDED MAILERS

The System Packaging CH4500 Series Automated Packaging System is called "COLD/HEAT" or "CH" because it uses both COLD FUSION and Heat Seal technologies. Together they produce a unique variable length mail order fulfillment package that is securely sealed, easy to open and easy to re-use for returns. This new system is ideal for packaging a variety of small items such as DVDs, prescriptions, nutraceuticals, electronics and jewelry that need extra protection. The items and invoice are inducted at the top of the machine by dropping them into a special funnel matched to your particular products. Once sealed, the package is labeled and scanned to verify that the correct shipping label was applied to the package. A scale can be easily integrated to create a complete semi-automated weighing, packaging and manifesting pack station. Unit speed is between 10 and 20 packages per minute depending upon machine configuration.

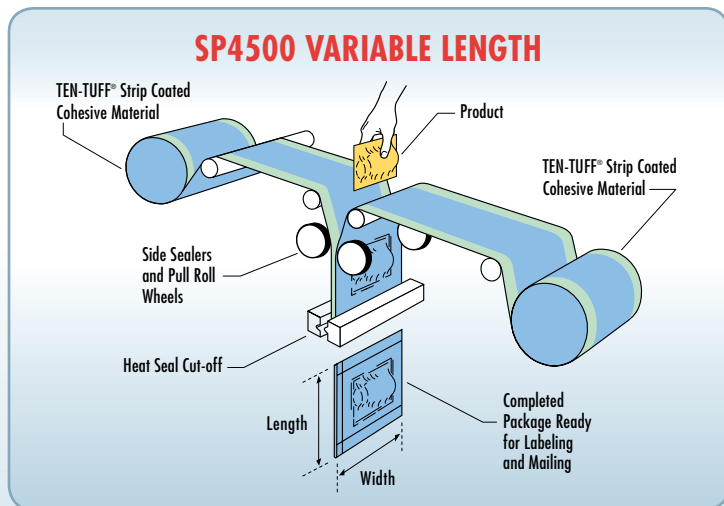

CH4500

COLD HEAT PACKAGING SYSTEM

STANDARD FEATURES

- Cold/heat sealing system using strip coated cold seal latex on sides and heat seal at front and back of package
- Touch screen controls
- Standard 12" maximum width with 15" also available
- Will accept 3-1/4" thick items
- Dial in length control system to vary package length
- Quick change pneumatic spindles
- No warm up or cool off time necessary

SYSTEM OPTIONS

- Random length cut off
- Electric eye cut off
- Print and Apply Labeler for direct package labeling
- Incline conveyors to remove packaging
- No product/no package sensor
- Fully integratable with weigh scale and scanner

TEN-TUFF STRIP COATED PACKAGE CHOICES

- PolyBubble
- PolyFilm

TYPICAL APPLICATIONS

- Small parts and items
- Prescriptions and nutraceuticals
- Jewelry and cosmetics
- DVDs, CDs and computer games

PACKAGE SIZES (12")

Minimum: 3" x 3"
Maximum: 12" x 20"

STANDARD MACHINE FOOTPRINT AND REQUIREMENTS

CH4500-12

L: 52" x 34" x 38"

Electrical: 220-440 volt, 60hz., 20amp

Note: Addition of some options may change requirements.

TENSION PACKAGING

Automated Order Fulfillment Solutions
www.tensionpackaging.com

819 East 19th Street, Kansas City, MO 64108

Main: 816-283-1475 ■ Fax: 816-283-1468

For more information, e-mail: packinfo@tension.com